
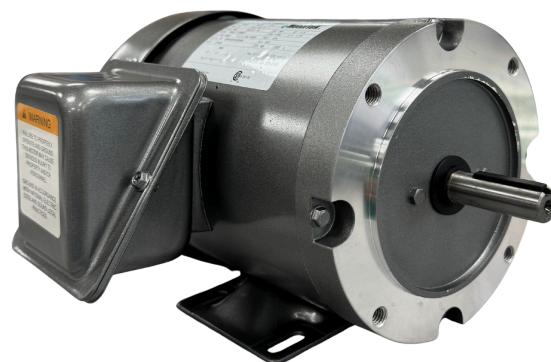


GENERAL PURPOSE THREE PHASE TEFC - C FACE MOTORS

eMotortek™

Features:

- Rolled Steel Construction
- Class "B" Insulation
- UL Listed & CSA Approved
- Continuous Duty
- Removable Bolt on Base
- Automatic Overload
- 40°C Ambient
- Reversible
- 1.15 S.F.
- 60 Hz.
- Ball Bearing



575 Volts



HP	RPM	Frame	Stock No.	Amps	"C"	Cross Reference
1/3	1800	56C	EME661C	0.65	12.63"	WE661C, K703
1/2	3600	56C	EME612C	0.82	12.63"	WE612C, K704
	1800	56C	EME662C	0.9	12.63"	WE662C, K705
3/4	3600	56C	EME613C	0.9	12.63"	WE613C, K706
	1800	56C	EME663C	1.0	12.63"	WE663C, K707
1	3600	56C	EME614C	1.3	12.63"	WE614C, K708A
	1800	56C	EME664C	1.4	12.63"	WE664C, K709A
1.5	3600	56C	EME615C	1.8	12.63"	WE615C, K721A
	1800	56C	EME665C	1.8	12.63"	WE665C
2	3600	56C	EME616C	2.1	12.63"	WE616C
	1800	56C	EME666C	2.4	12.63"	WE666C
3	3600	56C	EME617C	2.4	13.00"	WE617C

GENERAL PURPOSE THREE PHASE TEFC - C FACE MOTORS

eMotortek™

Features:

- Rolled Steel Construction
- Class "B" Insulation
- UL Listed & CSA Approved
- Continuous Duty
- Removable Bolt on Base
- Automatic Overload
- 40°C Ambient
- Reversible
- 1.15 S.F.
- 60 Hz.
- Ball Bearing

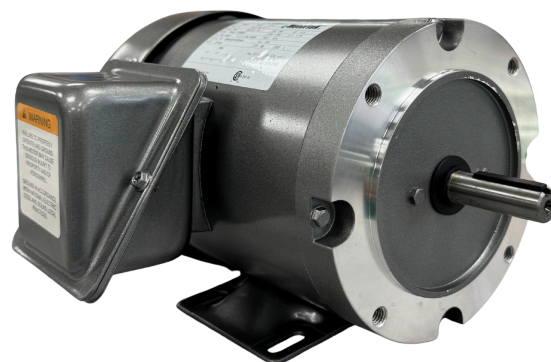

230 / 460 Volts

HP	RPM	Frame	Stock No.	Amps	"C"	Cross Reference
1/3	1800	56C	EME681C	1.6 / 0.8	12.63"	WE681C, 6580
1/2	1800	56C	EME682C	2.2 / 1.1	12.63"	WE682C, 6581
3/4	1800	56C	EME683C	2.8 / 1.4	12.63"	WE683C, 6582
1	1800	56C	EME684C	3.4 / 1.7	12.63"	WE684C, 6583A
1.5	1800	56C	EME685C	4.6 / 2.3	12.63"	WE685C, 6584A
2	1800	56C	EME686C	5.8 / 2.9	12.63"	WE686C