


FAN & BLOWER MOTORS

eMotortek™

Features:

- 48Y Frame
- Open Enclosure
- PSC - Capacitor included
- Class B Insulation
- 40°C Ambient
- Extended Bolts Shaft End
- Resilient Ring Mount
- Belly Band Mount
- Reversible Rotation - Reversing Plug
- 25" Leads
- Ball bearing
- Thermally Protected
- Shaft: 1/2" X 5" with Flat

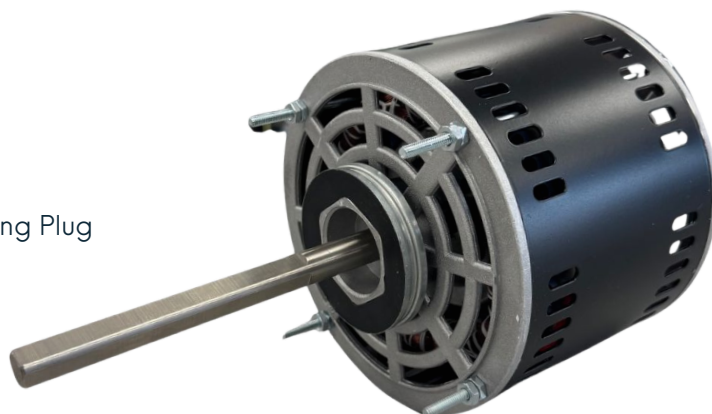

PRO SERIES

Stock No.	HP	Volts	Amps.	RPM	"A"	Cross References
3583	1/4	115	3.2	1075 / 3	4.40"	BC-B25-3SP1, DD3583, EM3583, DL1026, 1863
3584	1/4	208 - 230	1.6	1075 / 3	4.40"	BC-B25-3SP2, DD3584, EM3584, D1026, 1971
3585	1/3	115	4.2	1075 / 3	4.80"	BC-B33-3SP1, DD3585, EM3585, DL1036, 1864
3586	1/3	208 - 230	2	1075 / 3	4.80"	BC-B33-3SP2, DD3586, EM3586, D1036, 1972
3587	1/2	115	6.2	1075 / 3	5.63"	BC-B50-3SP1, DD3587, EM3587, DL1056, 1865
3588	1/2	208 - 230	2.8	1075 / 3	5.63"	BC-B50-3SP2, DD3588, EM3588, D1056 , 1973
3589	3/4	115	8	1075 / 3	5.63"	BC-B75-3SP1, DD3589, EM3589, DL1076, 8904
3590	3/4	208 - 230	3.8	1075 / 3	5.63"	BC-B75-3SP2, DD3590, EM3590, D1076, 8905

