


CONDENSER FAN MOTORS

eMotortek™

Features:

- 48Y Frame
- P.S.C. Design (Capacitor Included)
- 80°C Ambient
- Reversible Rotation - Reversing Plug
- Extended Thru-Bolts Lead Ends
- Thermally Protected
- Totally Enclosed Air Over
- Class F Insulation
- Ball Bearing
- 24" Leads
- Shaft: 1/2" X 5.5" with Flat

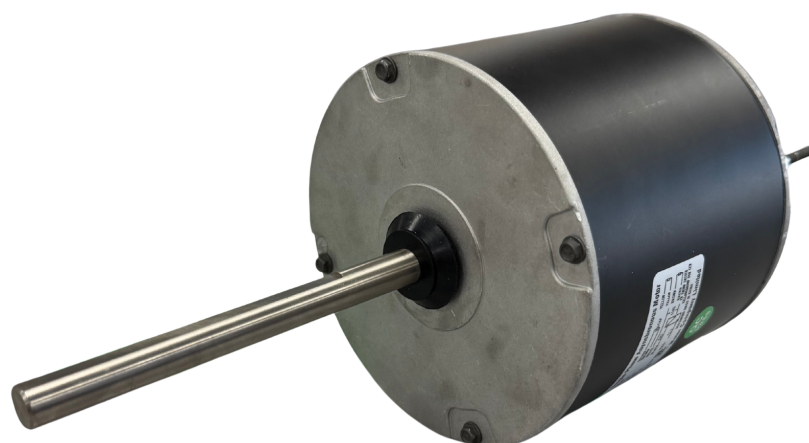

PRO SERIES

Stock No.	HP	Volts	Amps.	RPM	"A"	Cross References
3727E	1/6	208 - 230	1	1075	4.40"	SS3727, EM3727, 184, FE1016SF, FSE1016SV1, GE-3727, X411
3728E	1/4	208 - 230	1.3	1075	4.40"	SS3728, EM3728, 176, FE1026SF, FSE1026SV1, GE-3728, X412
3729E	1/3	208 - 230	2.4	1075	4.72"	SS3729, EM3729, 175, FE1036SF, FSE1036SV1, GE-3729, X413
3730E	1/2	208 - 230	2.8	1075	5.51"	SS3730, EM3730, 187, FE1056SF, FSE1056SV1, GE-3730, X414
3731E	3/4	208 - 230	3.7	1075	5.51"	SS3731, EM3731, 779, FE1076SF, FSE1076SV1, GE-3731, X469

